





## Model:CL30 (31.7 Quarts)



## Model:CL40 (42.3 Quarts)



## Model:CL50 (52.8 Quarts)



The Alpicool CL series portable fridge/freezer with various models offers premium quality and innovative design to satisfy our customers. High performance compressor produces impressive cooling/freezing. And designed with texture surface make this fridge solid, anti-scratch and fashion. It's a great choice of kit for those looking for a fridge/freezer portable freezer whether you're off to the park for a picnic, or on the road camping for months.



## FEATURES


- \* Multiple capacity options:30L, 40L, 50L, the storage room is big enough to keep food fresh and drinks cold on the journey
- \* Adjustable temperature from -20°C(-4°F)to 20°C(68°F)with high performance compressor;
- \* Choose HH mode for fast cooling or ECO mode for energy saving;
- \* 12/24V DC and 100V to 240V AC adapter included, you can use at home, car, and outdoors;
- \* Reverse fridge door design, make door-opening more flexible;
- \* Three stages battery protection system prevents vehicle running out of battery;
- \* With LED display and touchpad system adjustment, you can easily set your desire temperature;
- \* Recessed handles are molded into the refrigerator, and make it easier to carry and transport the fridge;
- \* The door latch ensures the door won't bounce off under a shaking environment and work normally;
- \* 2 cup holders are molded on the lid to keep drinks handy and prevent spilling;
- \* Silent operation and won't disturb you while resting.
- \* Shockproof and durable design for handling rocky road.



MODEL:	CL30	CL40	CL50
<b>TOTAL CAPACITY:</b>	30L/31.7 Quarts/1.06cu. Ft.	40L/42.3 Quarts/1.41cu. Ft.	50L/52.8 Quarts/1.77cu. Ft.
<b>POWER SUPPLY:</b>	24/12V DC,100-240V AC	24/12V DC,100-240V AC	24/12V DC,100-240V AC
<b>RATED CURRENT:</b>	AC 1.2-0.5A DC 5.0A/2.5A	AC 1.2-0.5A DC 5.0A/2.5A	AC 1.2-0.5A DC 5.0A/2.5A
<b>RATED POWER INPUT:</b>	60W	60W	80W
<b>FRIDGE DIMENSION (L x W x H):</b>	587*365*368mm 23 1/8 *14 3/8 *14 1/2 inch	587*365*438mm 23 1/8 *14 3/8 *17 1/4 inch	587*365*508mm 23 1/8 *14 3/8 *20 inch
<b>PACKING SIZE (L x W x H):</b>	654*418*425mm 25 3/4 *16 7/16 *16 3/4 inch	654*418*495mm 25 3/4 *16 7/16 *19 1/2 inch	654*418*565mm 25 3/4 *16 7/16 *22 1/4 inch
<b>NET WEIGHT:</b>	12kg/26.45lbs	12.5kg/27.56lbs	13kg/28.66lbs
<b>GROSS WEIGHT:</b>	14.5kg/31.97lbs	15kg/33.1lbs	15.5kg/34.17lbs
<b>TEMPERATURE RANGE:</b>	-20~20°C/-4~68°F	-20~20°C/-4~68°F	-20~20°C/-4~68°F
<b>FCL QUANTITY:</b>	220/455/546 (20'/40'/40'HQ)	176/364/455(20'/40'/40'HQ)	176/364/364(20'/40'/40'HQ)
<b>NOISE LEVEL:</b>	<45dB	<45dB	<45dB



LED digital display

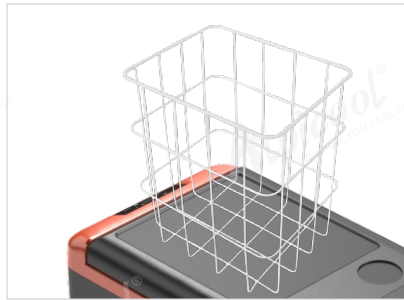

Wire basket(optional)



AC/DC dual use



Durable Latch



Detachable two-way door



Recessed handle



Texture surface



Cup holders



Interior chamber